





VIP Armored Range Rover Autobiography

ALPINE ARMORING INC.

alpineco.com



GENERAL SPECIFICATIONS

MAKE: Land Rover

MODEL: Range Rover Autobiography LWB

YEAR: NEW

ENGINE: 5.0L LR-V8 Supercharged Gas.

POWER: 500 hp @ 5,000 rpm

TRANSMISSION: 8-Speed Auto w/Paddle Shift

COLOR: Santorini Black

INTERIOR: Black Leather

SEATING: 2 + 2

\$8,040 lbs. (3,646 kg.) **FINAL WEIGHT:**

HEIGHT:

72 in.

(182 cm)

WIDTH:

82 in.

(208 cm)

LENGTH:

205 in.

(520 cm)

WHEELBASE:

123 in.

(312 cm)





Firewall

Ballistic steel firewall provides protection up front.

4-1

Roof

Roof is lined with ballistic steel at angle.





Floor

Floor is lined with ballistic steel to protect against mines and grenade blasts.

4-2

Doors

All doors are made from ballistic steel.





Battery Protection

Entire battery is enclosed in a fully ballistic steel casing.

4-3

Bulkhead

Rear Ballistic partition wall with viewing window installed behind rear seat





Overlaps

All doors and windows feature ballistic steel overlaps to keep shrapnel from angle shots from entering the cabin.

4-4

Wheel Wells

Front and rear wheel wells are lined with ballistic steel.





* Tel:+1.703.471.0002 * Fax:+1.703.471.0202 * www.alpineco.com * sales@alpineco.com *



Glass Thickness

Minimum 40 mm thick glass/polycarbonate composite transparent armor.

4-1



Anti-Spall Layer

Inner-most anti-spall layer prevents glass and bullet fragments from penetrating into passenger cabin area.

4-2



Multi-Hit Protection


All windows are capable of sustaining multiple hits while providing protection to passengers.

4-3



Anchored Windows

All windows are anchored for additional protection from explosions.

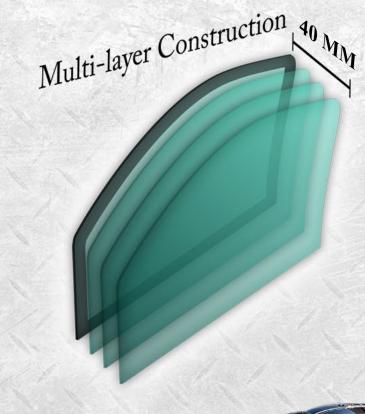







P.A./Multi-Siren System

Located on the center console. The multi-siren features standard siren tones, volume adjustment, and a public address system.

5-1

Battery Protection

The battery is encased in a ballistic steel box to protect it.

This Image is property of Alpine Armoring

5-2



Power Windows

The front two windows are powered and lower approximately 5-6 inches.

5-3

Fuse Box Protection

The fuse box is protected by a ballistic steel box.

5-4





Strobe Lights

Two red/blue strobe lights are mounted in the front grill. Controlled using the P.A./siren control unit in the center console.

5-5

Fuel Tank Protection

Fuel tank is protected by a ballistic steel box. Protects from two simultaneous grenades.

5-6





Rear Door Partition

Rear door with integrated ballistic glass & surrounded overlaps

5-7

Tailpipe Protection

The tailpipe features a special mesh that prevents the tailpipe from being sabotaged.

5-8

















































A										"no one protects you better"		
	SPECS			LEVELS				BULLETS				
WEAPONS	ТҮРЕ	CALIBER (mm)	CLASS	STANAG	UL	ALPINE	NIJ	CEN	MASS (g)	MATERIAL	VELOCITY	NUMBER OF SHOTS
A CONTRACTOR OF THE PARTY OF TH	.38 Special	9 x 19	Handgun	-	1	A1	I.II.IIA	-	8.00	rcci	358 M/S	-5
	.357 Magnum	9 x 33	Handgun	-	2	A2	I.IIA	B1 & B3	10.20	JSP	430 M/S	-5
	.44 Magnum	11 x 33	Handgun	1_	3	АЗ	IIIA	B4	15.60	LWC	440 M/S	5
1	MP5	9 x 19	SMG	-	6	A4	IIIA	B2	8.00	ICO	427 M/S	5 =
-	Shotgun	12 Gauge	Shotgun	-	3 & 4	Aã	IIIA	SG2	28.30	SLUG	503 M/s	3
	Tokarev	7.62 x 25	Handgun	-	-	A5	IIIA	-	5.50	LCSJ	488 M/s	
	Kalashnikov (AK-47)	7.62 x 39	Assault Rifle	-	-	A6	III	B5	9.70	SCCI	732 M/s	
-	Kalashnikov (AK-47 Military)	7.62 x 39 API BZ	Assault Rifle	11	-	A7	_	B5+	11.70	2001	774 M/s	-
	M16/AR-15	5.56 x 45 NATO SS109 5.56 x 45 NATO Ball	Assault Rifle	1	7	A8	IV	B5	4.00	rcci 2cci	900 M/s 833 M/s	3
Songe	Winchester .308	7.62 x 51	Rifle	1	7	A9	III	B6	10.90	rcci	810 M/s	-
	Remington 700 SPS	7.62 × 63 AP (.30-06)	High-Power Rifle	III	5 & 8	A10	IV	B7-	10.80 8.40	АР	869 M/s 930 M/s	-5
	Dragunov	7.62 x 54R B32 API	Sniper Rifle	III	-	A11	IV+	B7+	10.04	2001	854 M/S	
	50 Cal	12.7 x 99	High-Power Rifle	IV	10	A12	-	-	45.00	CJ	908 M/S	



UL Underwriters Laboratory, 752

NIJ National Institute of Justice, 0108.01

CEN European Standard

STANAG ... NATO's Standard (STANAG 4569)

ALPINE Alpine Armoring's Certified Standard

LCCJ Lead Core Copper Jacket

JSP Jacketed Soft Point

LWC Lead Wad Cutter

LCSJ Lead Core Steel Jacket

SCCJ Steel Core Copper Jacket

AP Armor Piercing

SG Shotgun

Shots (5) 11.4 cm Square Pattern

(Corners & Center)

Shots (3) 11.4 cm Triangular Pattern

Velocity Minimum Measured Velocity

NIJ Rating .. Levels I, II, IIA, & IIIA (based on 1 of 2 required calibers of ballistic threat)







